




Protrusion



Miniature Size



SUS Stainless steel

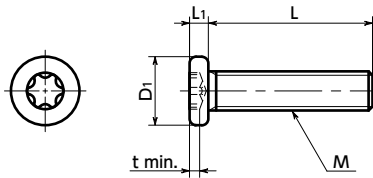

● Material/Finish



| | SNZCXS |
|-----------|-------------------------------|
| Main Body | SUSXM7 (Equivalent to SUS304) |

● Application

Reducing the size of equipment and devices
Compact precision equipment

- M1.4-M2.5. Miniature screws for precision instruments.
- Flat head machine screw type with low head height. For space-saving of equipment/devices and applications with limited overhead space.
- Hexalobular recess is unlikely to be damaged due to tightening, allowing safe and secure tightening to be performed.
- We manufacture products with special specifications such as ventilation holes, cleanroom washing and special packaging.

Unit : mm

| Part Number | M (Coarse) | | L | | | | | | | | D1 | L1 | t min. | Hexalobular Socket No. | Max. Torque (N·m) | Mass (g) | Qty per Pack |
|-------------|-------------------|-------|---|---|---|---|---|----|----|----|-----|-----|--------|------------------------|-------------------|--------------|--------------|
| | Nominal of Thread | Pitch | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | | | | | | | |
| SNZCXS-M1.4 | M1.4 | 0.3 | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 2 | 0.5 | 0.25 | 3 | 0.07 | 0.024 - 0.09 | 50 |
| SNZCXS-M1.6 | M1.6 | 0.35 | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 2.4 | 0.5 | 0.3 | 4 | 0.1 | 0.04 - 0.12 | 50 |
| SNZCXS-M2 | M2 | 0.4 | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 3 | 0.6 | 0.35 | 5 | 0.22 | 0.062 - 0.2 | 50 |
| SNZCXS-M2.5 | M2.5 | 0.45 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 4 | 0.8 | 0.55 | 6 | 0.46 | 0.12 - 0.34 | 50 |

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

● Related Products

SKX Hexalobular Wrench



SKX-N Hexalobular Wrench for Extremely Limited Access Spaces



SKXB Hexalobular Short Bit



SRD Magnet Screwdriver



● Part Number Specification

SNZCXS-M2-3

1

2

| | | | | |
|--------------------------|----------------------------|-------------------------|--------------------------|--------------------------------------|
| 1 Individual Sales | Cleanroom Wash & Packaging | Screw Length Adjustment | Vibration Resistant | Modification process for captive use |
| Available / Add'l charge | Available / Add'l charge | Not Available | Available / Add'l charge | Not Available |