




# SVHS Vented Hex Head Screws

Vacuum 
 Cleanroom wash & packaging 
 SUS Stainless steel

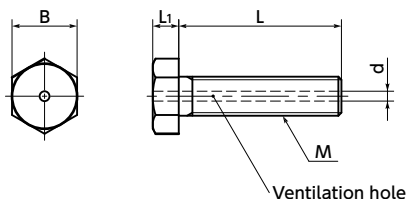

Ventilation hole

## Material/Finish



	SVHS
Main body	SUSXM7 (Equivalent to SUS304)
Strength Class	A2-70



- The ventilation hole easily releases gas trapped in the screw holes of equipment and machines, and supports vacuum drawing of vacuum devices.
- The ventilation hole is machined by a method that has less effect on metal structure. It suppress the brittle failure and generation of outgas in a vacuum environment during use.
- For locations with narrow top space and hex wrench cannot be used.
- Cleanroom wash and cleanroom packing are completed. ➔ P.xxxx

## Application

Vacuum device / Vacuum container / FPD production device / Semiconductor manufacturing device / Electron microscope

Unit : mm

Part Number	M (Coarse)		L										L1	B	d max.	Mass (g)	Qty per pack
	Nominal of Thread	Pitch	6	8	10	12	16	20	25	30	35	40					
<b>SVHS-M3</b>	M3	0.5											2	5.5	1.2	0.67 - 1.1	10
<b>SVHS-M4</b>	M4	0.7											2.8	7	1.5	1.6 - 2.5	10
<b>SVHS-M5</b>	M5	0.8											3.5	8	1.5	2.8 - 4.7	10
<b>SVHS-M6</b>	M6	1											4	10	2	4.9 - 8.1	10
<b>SVHS-M8</b>	M8	1.25											5.3	13	2	11 - 18	10

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

## Related Products

For ventilation of drilled hole,

please use **SWAS-VF**.

➔ P.xxxx



**SWAS-VF** Washer  
(with Ventilation Groove)

## Part number specification

**SVHS-M5-25**

1

2

1 Individual Sales ➔ P.xxxx	2 Cleanroom Wash & Packaging ➔ P.xxxx	3 Screw Length Adjustment ➔ P.xxxx	4 Vibration Resistant ➔ P.xxxx	5 Modification process for captive use ➔ P.xxxx
Available / Add'l charge	Cleanroom washed and packed	Available / Add'l charge	Not Available	Please feel free to contact us